



Interactive Button / Touch Media Player Solution

The Series MPC300BT is available as Box with a terminal block to easily screw the push button cables on it and RS232 Interface to connect to any RS232 Touch Screen. It comes with the configuration Software MPO Touch (Media Player Organizer) which is very easy to use and allow you in 3 steps to configure the MPC300BT. It's a very easy to use Standalone Kiosk Solution, and simply by changing the Storage Device (CF card, SD, or USB) you can change the content and interactivity.



Front view



Rear view

Features

- Auto and Loop playback seamlessly
- Auto Slide show with multiple transition effects
- Playback Video (MPEG1,2,4), Digital pictures (JPEG), or Digital Music (Mp3)
- All content can store in any of 6 types of Memory Card (CF/MD/SD/SM/MS/MMC) or USB flash drive
- Stable and reliable appliance - shorter boot up time, virus proof



Specifications

MODEL NAME : MPC300BT

General	Storage Media	CF/Micro Drive/SD/SM/MS /MMC/USB flash drive
	Power Supply	12V 2A DC input
	Power Consumption	4.8W ,typical, normal operation
	Operation temperature	0 to 50 Centigrade, Humidity 5~85%@50c
Content	Video Format support	MPEG1,MPEG2,MPEG4*
	Graphics Format support	JPEG
	Audio Format	MP3
Interface	Video Output	Composite, S-Video, VGA
	Audio Output	Earphone Output
	COM Port	RS232 (for touch monitor)
	Terminal Block	16 pin terminal Block (for push button)
	USB Port	USB x 1
Accessories	Remote Controller	
	AC-DC power adapter	
	AC power cable	
	User Manual CD	

* CF card is recommended when playing MPEG2 Video.

Interactive Button Media Player



Front view



Rear view

1. RS232 Connects to Touch Monitor
2. CF Cards
3. Smart Cards
4. USB
5. Power
6. Audio

7. S-Video
8. Composite
9. VGA
10. Terminal block to connect push-buttons

Interactive Button / Touch Media Player Solution




4 Easy Steps of Hardware Installation

Step1.	Step2.	Step3.	Step4.
Connect RS232 cable to MPC300BT and connect another end to touch monitor	Connect output cable (forinstance : VGA) to MPC300BT and connect another end to touch monitor	Plug in terminal block	Connect power cable of MPC300BT and touch monitor

Tips: pushbutton and touch control can coexist for a system or you can choose either one of them. Skip step1 if you don't need touch control; skip step3 if you don't need pushbutton.

1 Easy Software Defining Touch/Button Actions

We provide the simplest and most powerful software (MPO) for you to define the touch and push button actions, such as showing a project picture or playing a music video.

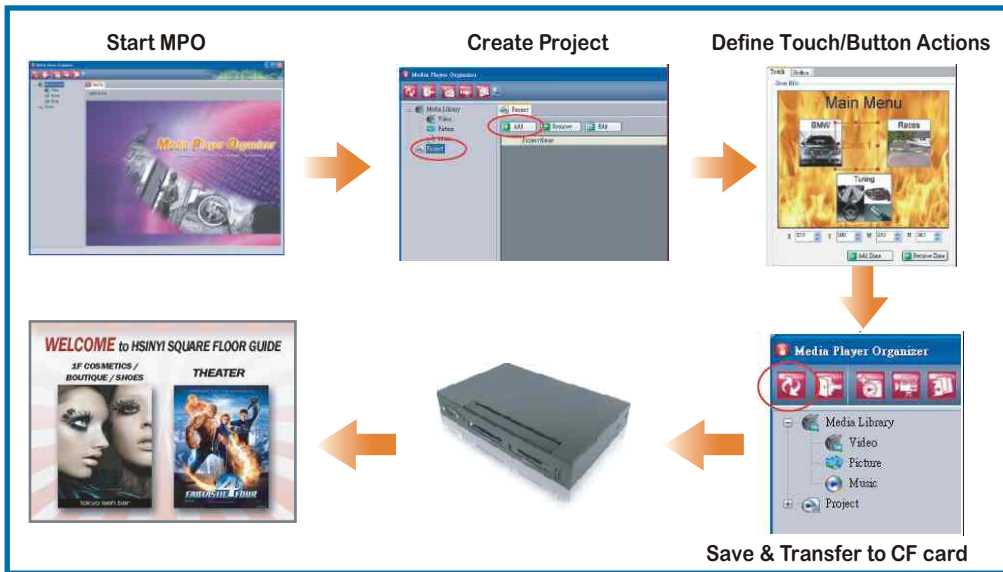

Applications

Product introduction	Vehicle Promotion	Album Selling