

Open Frame LCD

Open Frame LCD



21.5" (16:9)

Specifications




| | |
|---------------------------------|---|
| Model Name | W22L100-OFA3 |
| Viewable Size Image | 21.5" (16:9) |
| Active Display Area (mm) | 476.64 (H) x 268.11 (V) |
| Pixel Pitch (mm) | 0.24825 (H) x 0.24825 (V) |
| Number of Pixels | 1920x1080 |
| Contrast Ratio | 3000:1 (typ.) |
| Display Color | 16.7M (8bit/color) |
| Brightness (cd/m ²) | 250 (typ.) |
| Viewing Angle (CR ≥ 10) | -89~89 (H); -89~89 (V) |
| Synchronization Range | |
| Horizontal/Vertical | 55~91KHz / 50~76Hz |
| Recommended Resolution | 1920x1080 @ 60Hz |
| Signal Connector | 15 pin D-sub |
| Power Source | 12V DC in, with External AC to DC Adapter (100~240V AC) |
| Power Consumption | 40W typical, normal operation |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESA DDC 1/2B |
| Optional Video Input | S-Video, Composite |
| Optional DVI Input | Yes |
| Optional Touch Screen | Resistive |

Remarks: W22L100 series= VGA input only

W22L110 series= VGA+Video Input

Mechanical Drawing

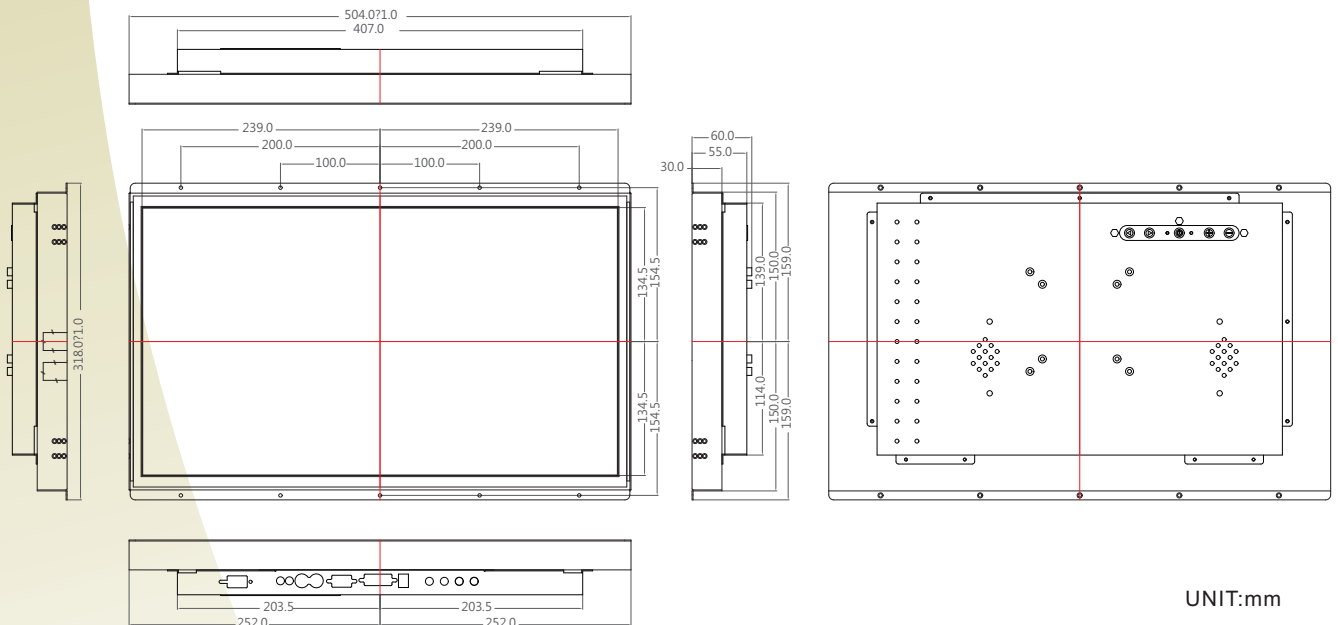

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.