

Open Frame LCD

Open Frame High Brightness Display

10" (16:9)


Specifications

RoHS
COMPLIANT
2011/65/EU

Model Name	W10L100-OFH1HB(LED)
Viewable Size Image	10" (16:9)
Active Display Area(mm)	220.416 (H) x 129.15 (V)
Pixel Pitch(mm)	0.21525(H) x 0.21525(V)
Number of Pixels	1024 x 600
Contrast Ratio	500:1 (typ.)
Display Color	262144 (6bit/colors)
Brightness(cd/m ²)	800 (typ.)
Viewing Angle(CR>=10)	-70~70(H); -60~50(V)
Synchronization Range	31.5~46.9KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	800x600@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	7 W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2 B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	4 Wire Resistive

W10L100 = VGA input only

W10L110 = VGA + Video input

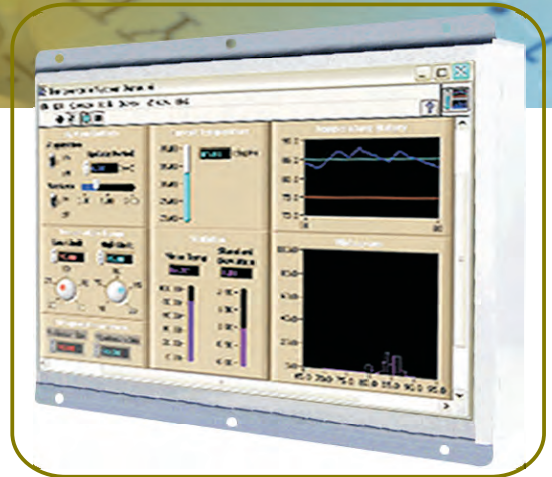

Mechanical Drawing

