

Open Frame LCD

(Typical)

Open Frame LCD (LED Backlight)




32"(16:9)

Specifications




Model Name	W32L300-OFA3
Viewable Size Image	32"(16:9)
Active Display Area(mm)	698.4 (H) x 392.85 (V)
Pixel Pitch(mm)	0.3637(H) x 0.3637(V)
Number of Pixels	1920 x 1080
Contrast Ratio	4000:1(Typical)
Display Color	16.7M
Brightness(cd/m ²)	350(Typical)
Viewing Angle(CR>=10)	-89~89(H);-89~89(V)
Standard Input Signal	1 x VGA 1 x HDMI
Accessories	Power Adapter VGA cable HDMI cable 13 keys IR remote control pad
Power Input	24V DC in, with external AC to DC Adapter
Power Consumption	75W typical,normal,operation
Operating temperature	0~50°C
Storage Temperature	-10~60°C
Touch Screen (Optional)	SAW P-cap. (Customized)
Remote Control (Optional)	RS232 port
Audio (Optional)	Audio in, Stereo speakers

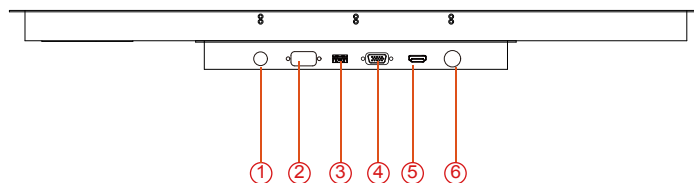

1. Audio in (Optional)
2. RS-232 for remote control (Optional)
3. USB for Touch (Optional)
4. VGA
5. HDMI
6. 24V DC-in

Mechanical Drawing

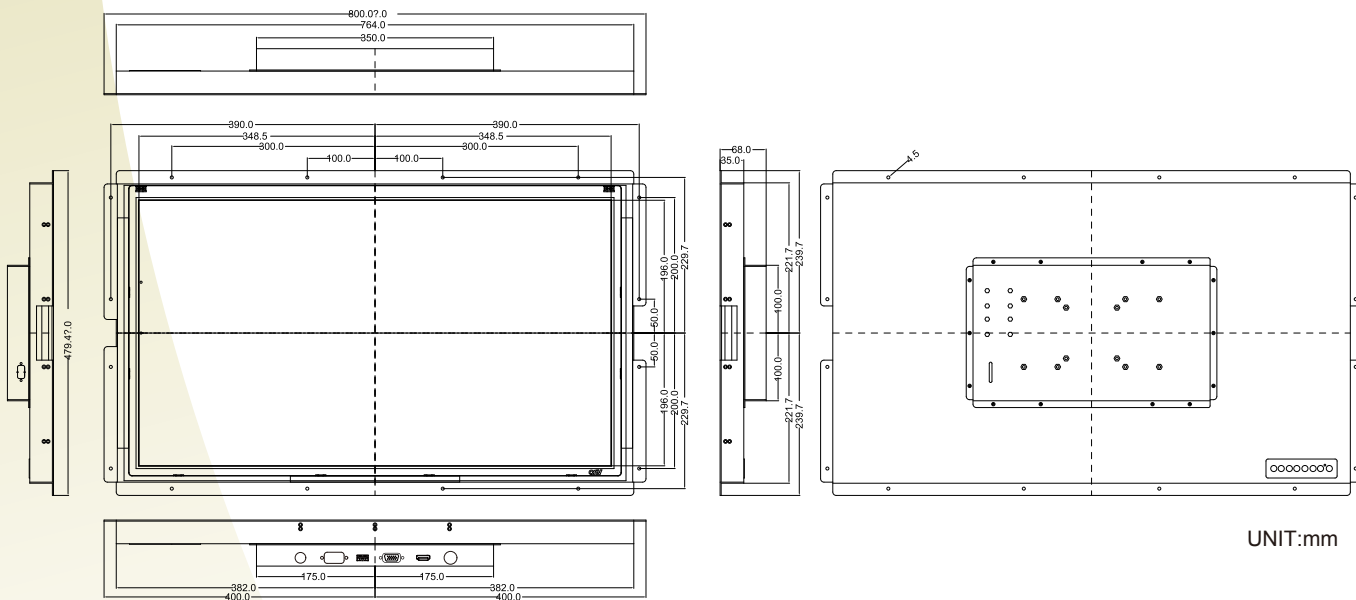

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.