

P-Cap Panel Mount LCD Front side IP65




21.5" (16:9) P-Cap LCD

Specifications

Model Name	W22L100-PPA3
Viewable Size Image	21.5" (16:9)
Active Display Area (mm)	476.64 (H) x 268.11 (V)
Pixel Pitch (mm)	0.248 (H) x 0.248 (V)
Number of Pixels	1920 x 1080
Contrast Ratio	1000:1 (typ.)
Display Color	16.7M (8bit/color)
Brightness (cd/m ²)	250 (typ.)
Viewing Angle (CR>=10)	-85~85 (H); -80~80 (V)
Synchronization Range Horizontal/Vertical	31.5~80.0KHz / 60~75Hz
Recommended Resolution	1920 x 1080 @ 60Hz
Signal Connector	15 pin D-sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	30W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Touch Screen	Projective Capacitive multi-touch

Remarks: W22L100 series= VGA input only
W22L110 series= VGA+Video Input

Mechanical Drawing

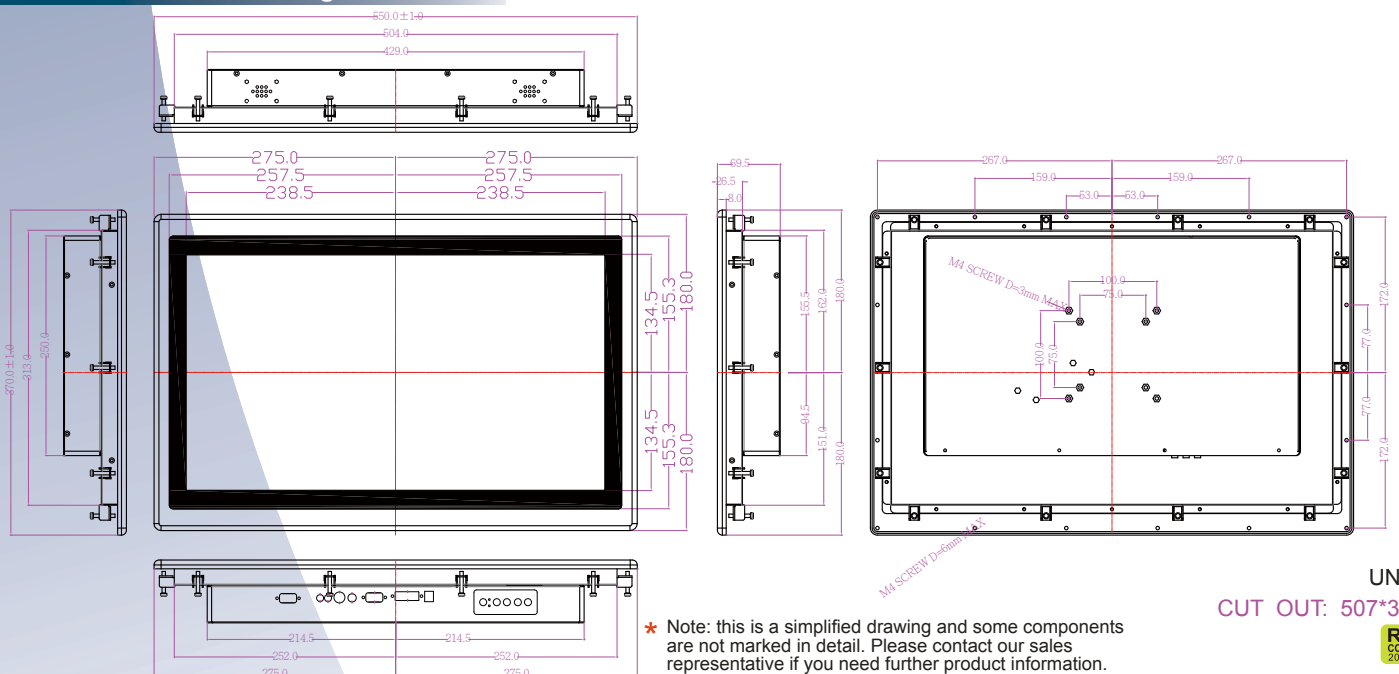

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

UNIT: mm
CUT OUT: 507*312 mm

