

Chassis Touch Monitor

Chassis Touch Monitor




32"(16:9)

Specifications

Model Name	W32L300-CHA2
Viewable Size Image	32"(16:9)
Active Display Area(mm)	698.4(H)x392.85(V)
Pixel Pitch(mm)	0.36375
Number of Pixels	1920x1080
Contrast Ratio	5000:1(typ.)
Display Color	16.7M(8bit/colors)
Brightness(cd/m) ²	400(typ.)
Viewing Angle(CR>=10)	-89~89(H);-89~89(V)
Synchronization Range	
Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1920x1080@ 60Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, 10%
Power Consumption	150w typical,normal,operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video/ Composite
Optional DVI Input	Yes
Optional Touch Screen	SAW

Remarks:W32L300 series= VGA Input only
 W32L340series= VGA+Video Input
 *External adapter is default

Mechanical Drawing

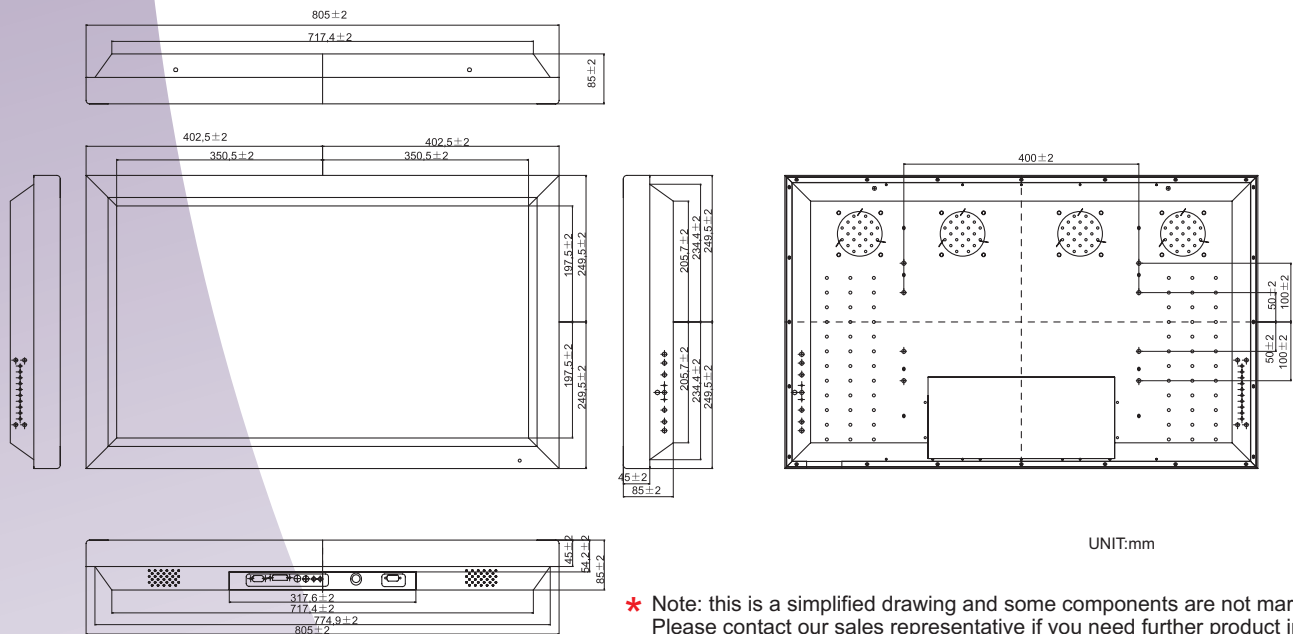

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.0	First Release	Aug-05-10
1.1	Spec Change	Dec-15-10
1.1	Spec Change	Jan-10-11