




42" All-in-One Signage Display (W42IQWB-OML2/OPS)

-Based on Intel Open Pluggable Specifications(OPS)



Introduction:

- Different from traditional digital signage that is PC box plus monitor or integrated panel PC, the innovative digital signage solution, 42" All-in-One Signage Display, is designed as a combination of pluggable module and monitor that standardize the connectors and signals that cross from the main IA board (digital signage player) into a digital signage display. It not only is easily installed and maintained but also can save space and cost.

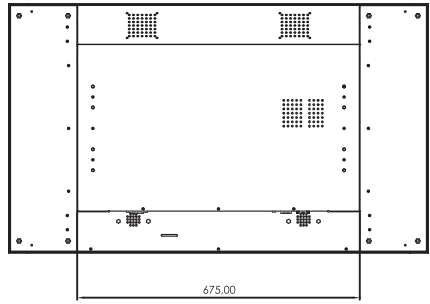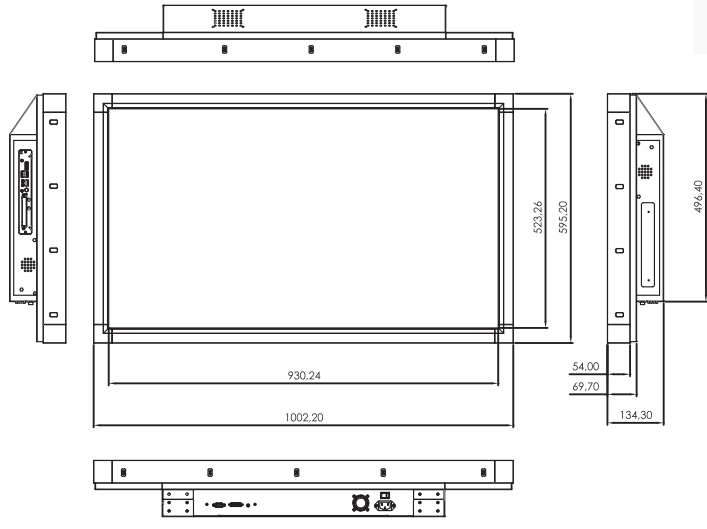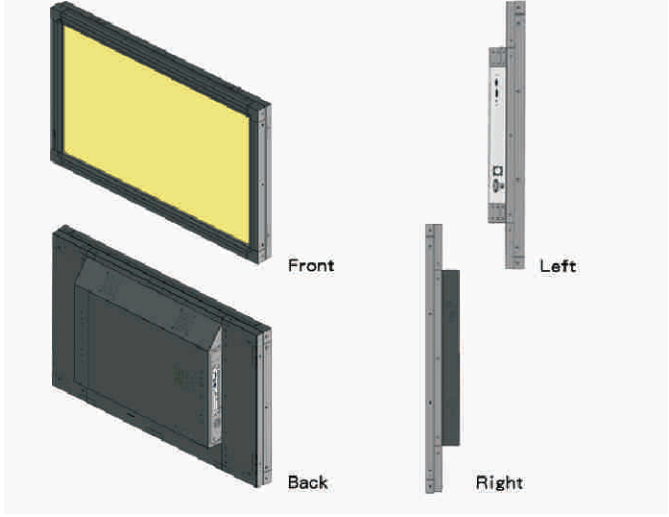

Measurements shown in mm
All Dimensions are ± 0.5 mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Whole All-in-One Signage Display

- Construction : Aluminum housing
- Mounting : VESA Mounting
- Dimension : 1002 x 134.3 x 595.2 m m (W x H x D)

I/O Connectors

- Left External I/Os : 1xVGA
 - 1xDVI
 - 1xAudioin
 - 1xAC-in
 - 1xAC Power switch
 - 1 x Display Port
 - 2 x USB 2.0
 - 1 x LAN Port
 - Power Button
 - Line In / Line Out
 - 1 x 2.5" HDD or SSD changeable design
- Display Side
- Module Side

Display

Panel Spec

- Size : 42" Backlight TFT
- Resolution : 1920 x 1080
- Contrast Ratio : 1400:1
- Viewing Angles : -89~89(H);-89~89(V)
- Max Colors : 16.7M(8bits/colors)
- Brightness : 500 nits

Environmental Specification

- Operation Temperature : 0~ 50°C
- Operating Humidity : 30% ~ 90% (non-condensing, RH)

Power Supply

- Power Input : 110~230V AC-in

Software (Optional)

- MSO-Pro software : Flash, HTML, PowerPoint supported

