

Rugged Panel PC



Model:R10IB3S-VMT2

Product Features:


- Ultra Low Bay Trail N2930 1.83GHz Processor Fanless Design
- High Quality 10.4" Panel, 1024 x 768 resolution
- Full IP65 Dust / Water Proof Enclosures (Except I/O parts)
- Aluminum Housing with Anti-Corrosion Treatments
- Anti-Shock and Vibration Standard according to MIL-STD-810 & IEC60068-2-27
- 5 Wire Resistive / Anti-Reflective Protection Glass (Optional)
- Optional GPS, 3G / WLAN(Either one). GPIO / Canbus (Either one)
- Wide Range 9 to 36V DC Input Acceptable
- Optional 6-60V DC Input, and Optional for Ignition On/Off delay
- Compliance with EN50155

Product Specifications:

Display	Model Name	R10IB3S-VMT2
	Size	10.4"
	Resolution (pixels)	1024 x 768
	Number of Colors	16.2M (6 bits+FRC)
	Brightness (cd/m ²)	350 (typ.)
	Contrast Ratio	1200 :1 (typ.)
	Viewing Angle	-88~88 (H) ; -88~88 (V)
	Active Area	201.4 (H) x 157.8 (V)
	Touch (optional)	5 Wire Resistive
System	Processor	Intel® Bay Trail N2930 1.83Ghz Processor
	Chipset	Bay Trail SoC Chipset
	BIOS	AMI 16Mbit Flash
	Memory	1xDDR3L 1600 MHz SO-DIMM Max. 8GB
	Ethernet	Intel® I210-AT GbE LAN
	Storage	mSATA SSD
	Expansion Slot	1 x Mini PCIe slot (for wireless module) 1 x Mini PCIe slot (for SATA SSD)
	Input / Output	Back Panel I/O Port
		2 x RJ-45 (10/100/1000 Mbps) 1 x HDMI 1 x DC-in Jack (Phoenix type) 1 x USB 3.0, 1 x USB 2.0 1 x RS232/422/485, 1 x RS232 WLAN antenna SMA in top (Optional)
Environment	Operating Temperature	-25 deg.C to 55 deg.C
	Storage Temperature	-30 deg C to 70 deg C
	Humidity	10% to 95% (non condensing)
	Shock*	Operating:30g for 18ms, 300m/s ²
	Vibration*	Operating: 1.60/1.96/2.18 g rms for XYZ / 5-500Hz
	Power Input	9~36V DC in (Phoenix type) Optional 6-60V DC in, with Ignition On/Off delay
Mechanical	Power Consumption	32W typ.
	Dimensions (W x L x H)	315 mm x 250 mm x 67 mm
	Approximate Weight	3.3Kg*
	*Weight of this device will be more or less depending upon actual component configuration	
Driver OS Support	Windows Embedded Standard 7 (64-bit) Windows Embedded 8.1 Industry Pro 64-bit Windows 10 IoT Enterprise	
Packing List	(IB32) SBC Manual & Driver CD	
Product Optional Items	Mounting Bracket and Kits	One robust bracket with locking handle (Can adjust from -5 deg.C to 90 deg.C)
	Sunlight Readable	Transflective film enhancement for optional
	Anti-reflective Glass	3 mm (Replace touch)
	WLAN / 3G	Either one
	GPS	USB interface
	Digital IO / Canbus	Either one




I / O View:

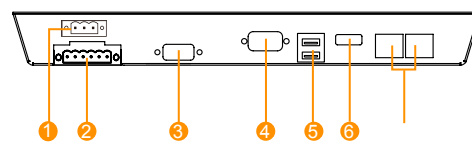

1. 9~36V Terminal Block
2. CanBus / GPIO (Optional)
3. RS232
4. RS232/422/485
5. 1xUSB 3.0 1xUSB 2.0
6. HDMI
7. 2xLAN

Front OSD Control Function:

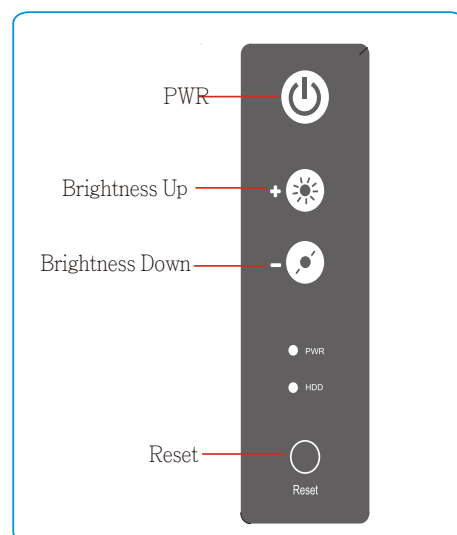

Drawing w / Mounting bracket:

