

M700DM8-ME, 7-inch Rugged Tablet PC

A Rugged Tablet that Can Survive Any Environment and Get Real Work Done

M700DM8-ME is a compact rugged tablet PC with robust set of features designed to withstand industrial use while providing high tech solutions that increase productivity, improve safety, and reduce operational costs.

The processing power comes from ARM A53 Octa Core processor that supports Android 7.0 OS. The tablet features a brilliant, in-plane switching with projective capacitive touch screen and offers 1280 x 720 pixel resolution. Weighing at just 1.2 pounds (approx. 550 grams) the M700DM8-ME delivers lightweight mobility in a pocket-size rugged tablet.



Highlights

- ARM A53 Octa Core Processor
- 7" 1280 x 720 TFT Panel with direct optical bonding
- Support Android 7.0 OS
- Hot-swappable battery design
- Default NFC Reader with optional 2D Barcode Reader
- IP65 waterproof and dustproof
- antimicrobial surface coating

Order Information

M700DM8-ME	Default NFC Reader with optional 2D Barcode Reader Default 3G/4G LTE
------------	---

White color housing MOQ 500 PCS

M700DM8-ME, 7-inch Rugged Tablet PC

A Rugged Tablet that Can Survive Any Environment and Get Real Work Done

Display Specification

Size	7-inch
Resolution	1280 x 720
Brightness	650 nit
	With direct optical bonding for sunlight readable
Touch	Multi-touch projected capacitive
Contrast Ratio	800:1
Viewing Angle	80/80/80/80
Technology	• Ambient light sensor, g-sensor • Automatic screen rotation

System Specification

Processor	ARMA53 Octa-core 1.3 GHz
System Memory	2GB RAM ¹
Storage	16GB eMMC
	Additional storage available with optional Storage Card: SD (up to 2 GB), SDHC (up to 32 GB)
Operating System	Android 7.0

Wireless Communication

WLAN	802.11 a/b/g/n
BT	BT 4.0
	Support BLE mode + wide-band speech
GPS	GPS / AGPS / GLONASS
WWAN	3G/4G LTE

Interface

Docking Connector	1 x docking connector
USB	1 x Micro USB OTG
Power Input	1 x Power Jack
Micro SD	1 x Micro SD Card Slot
SIM Card Slot	2 x SIM Card Slot

Keyboard and Input

Touch	10-point multi touch, support Hand / Gloves and Rain Mode
Button	On-screen QWERTY keyboard Button 1 x Volume +/- , 1 x Power Button, 1 x Home Button, 1 x Menu Button, 1 x Return Button, 1 x Trigger Button
LED Indicators	2 x LED indicators (Power, Battery)

Audio

Microphone	2 x Built-in Mic
Speaker	1 x 1.2 W speaker
Earphone	1 x Earphone

Cameras

Web Camera	2MP Camera
Rear Camera	8MP Camera with LED auxilliary light (auto focus)

Data Capture

NFC	NFC (Read / Write, Peer to Peer mode)
Barcode	2D Barcode Reader (Optional)

Security Function

Mobile Device Mgmt.	SOTI Mobicontrol compatible ²
---------------------	--

Mechanical and Environment

Dimension (W x L x H)	212.4 x 132.8 x 19 mm (8.36 x 5.23 x 0.75 inches) ³
Weight	550g
Housing	Antimicrobial surface coating (Optional)
Operating Temperature	0°C to 35°C, Humidity up to 95%
Storage Temperature	-20°C to 60°C, Humidity up to 95%
Humidity	5% to 95% RH, non-condensing
IP Proof	IP65 Certified, waterproof and dustproof
Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I
Drop	MIL-STD-810G Method 516.6, 5 ft ⁴

Power Management

Power Input	5V DC
Battery	3.7V 5300mAh Li-Poly optional for Hotswappable function
Battery Operating Time	20Hr ⁵
Adapter	100-240V/ 5V 3A Adapter

Accessories


Standard Accessories

Universal Adapter	9226015W05V1
Battery	98TZ00ZZ0001

Optional Accessories ⁶

Battery Charging Dock	98TA00Z00003
Vehicle Dock (Charging + Connectors)	98TA07Z00004
Vehicle Dock (Charging Only)	98TA07Z00003
Desk Dock	98TA07Z00005
Hand Strap	98K000A0004R
Carry Bag	9B000000000X
Micro SD Card	76G004300000
Capacitive Touch Stylus	9B0000000326
Mobile Printer MX20	9B000000007B
Mobile Printer MX30	9B000000007A
Vehicle Adapter	98TZ00ZZ0006

Drawing ⁷

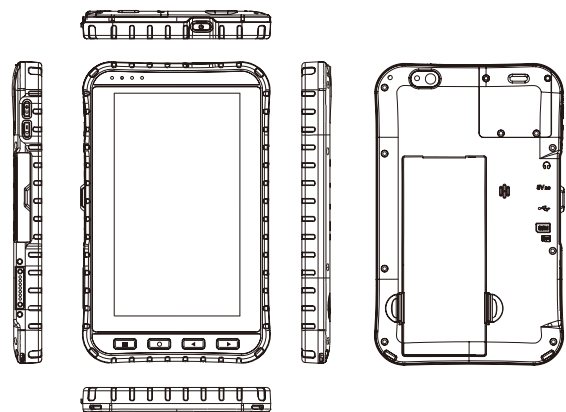

Caution

Do Not Expose the Battery Pack to Excessive Heat, or Extreme Heat (Near Fire, in Direct Sunlight for example)
Do not expose bare skin to this product when handling this unit in extreme hot or cold environments

1. Total usable memory will be less depending upon actual system configuration
2. SOTI are available upon request
3. Length measurements do not include protrusions.
4. The drop test with high-capacity battery must come with hand strap
5. Measured at dimming LCD brightness. Varies depending on the usage conditions, or when an external device is attached.
6. Accessories and Integrated Options may vary depending on your configuration.
7. This is a simplified drawing and some components are not marked in detail.