



W20LS01-FCA3BS (Master Player)

20.1" Bus Signage Bundle

20.1" Master Player


W20LS01-FCA3BS

Standard Feature:

- ◆ ABS Chassis
- ◆ Pole Mounting
- ◆ Built-in MSS350
- ◆ Network Player
- ◆ Protection Glass
- ◆ Wide Voltage Input
- ◆ 802.11 b/g Wireless module

Optional Feature:

- ◆ GPS receiver
- ◆ 3G Modem built-in
- ◆ Sunlight Readable
- ◆ VGA / Audio Extender
- ◆ CPM Box

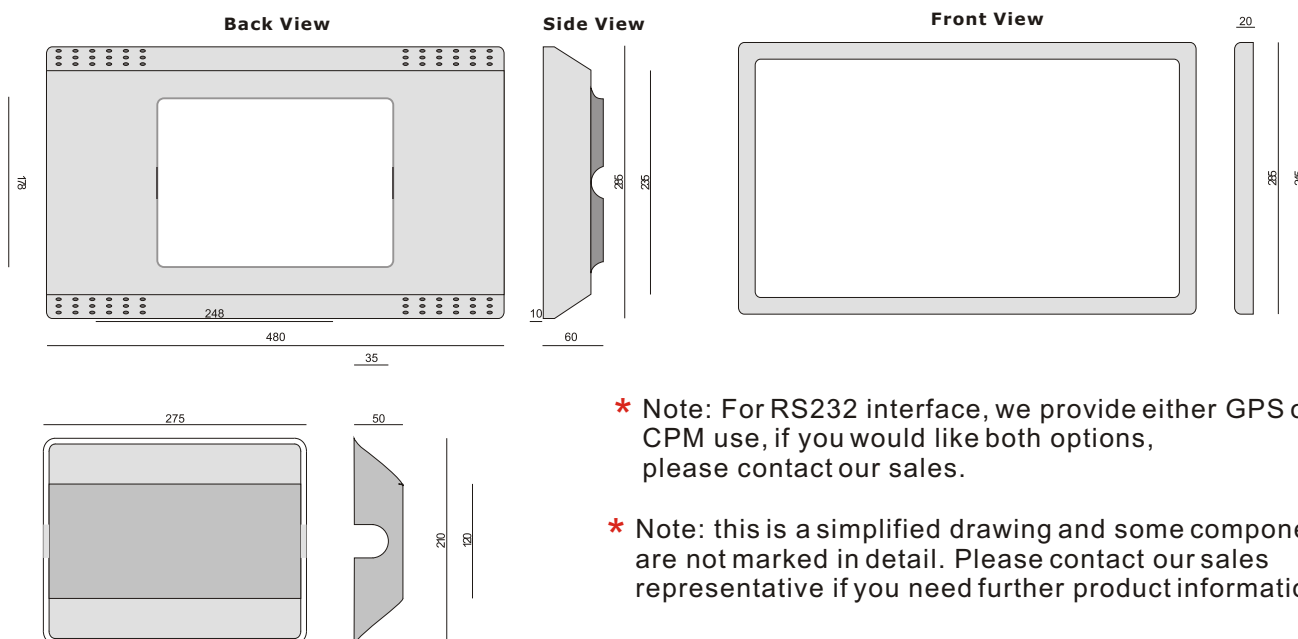

* Note: For RS232 interface, we provide either GPS or CPM use, if you would like both options, please contact our sales.

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

LCD Optical Spec:

- Active Display Area : 443.6mm(H)X249.41mm(V)
- Pixel Pitch : 0.325mmx0.325mm
- Number of Pixels : 1366x768
- Contrast Ratio : 700:1
- Display Color : 16.2M(6bits+FRC)
- Brightness(cd/m2) : 450
- View Angle(CR>=10) : -80~80(H);-60~80(V)

Input/Output:

- Output
 - Audio Output : 2 x 2W speakers
 - Video Output : 1 x DVI output to another monitor
- Network connection
 - Ethernet LAN : 1 x RJ45-10/100/Mbps

General/Content:

- General
 - Storage Media : 512MB CF, Optional with bigger capacity
 - Content Update : Ethernet/WLAN/USB flash drive
- Content
 - Video Format Support : MPEG1,MPEG2,MPEG4
 - Graphic Forma Support : JPEG,BMP
 - Text Banner : Variable scrolling speed and position

Environment Considerations:

- Operating Temperature : 0 to 50 °C
- Humidity : 5-85%@50 °C

Power Specifications:

- Power Consumption : Approx:60W
- Power Input : Terminal Block for 8~32V DC Input

Rev.	Reasons	Revised Date
1.0	New add	Feb-04-09
1.1	Picture change	Mar-06-09