


Winmate EL-Series HMI


5.6" EL-Series HMI with Freescale i.MX6

W05FA3S-ELT1

- 5.6" 1024 x 600 Resolution with P-Cap Multi-touch screen
- NXP A9 i.MX6 Dual Core 1GHz
- Fanless cooling system and Ultra-low power consumption
- Front IP65 Water and Dust Proof
- 1 x USB, 1 x USB OTG, 1 x RS485, 1 x RJ45 / LAN

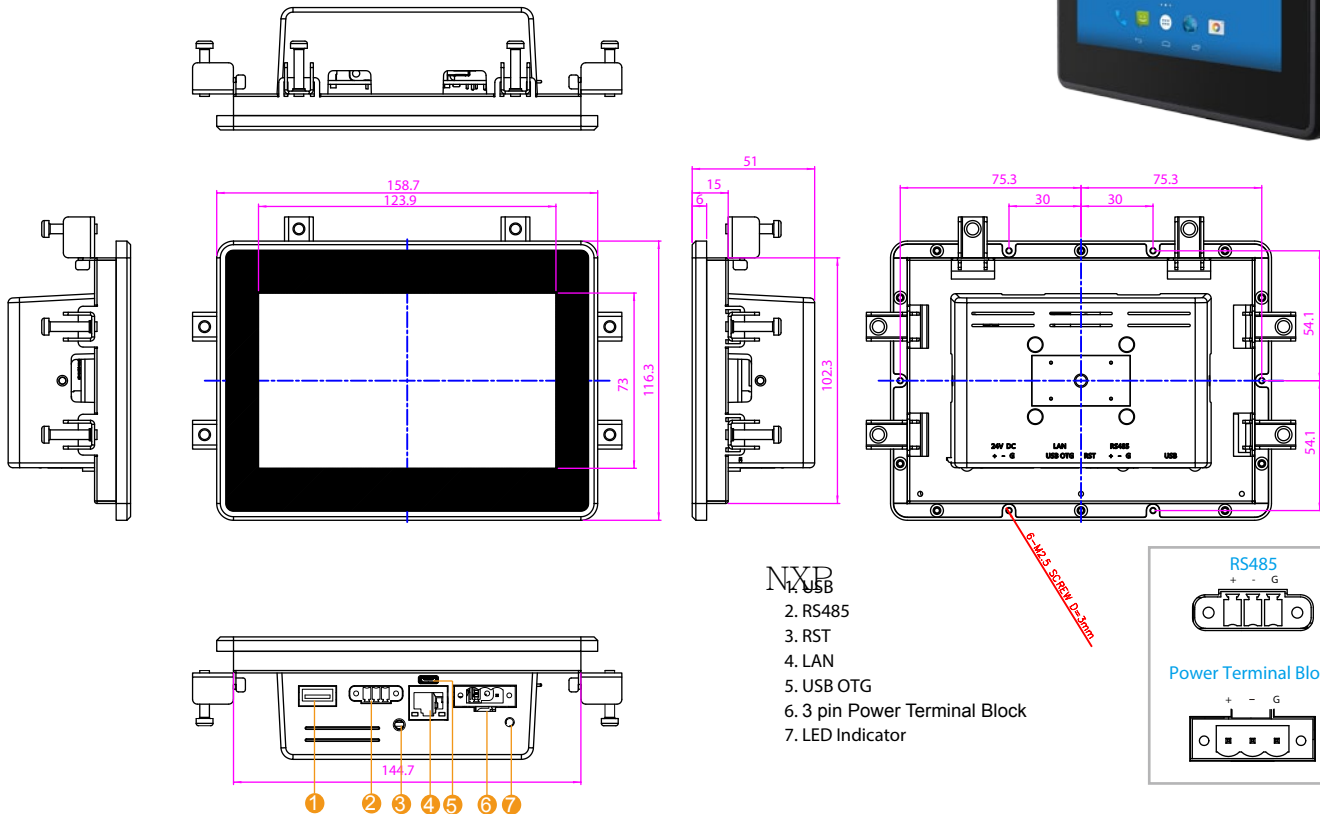

- NXP**
1. USB
 2. RS485
 3. RST
 4. LAN
 5. USB OTG
 6. 3 pin Power Terminal Block
 7. LED Indicator



Specifications

System :

- Processor : NXP A9 i.MX6 Dual Core 1GHz
- System Memory : 1GB LPDDR3
- Storage : Onboard 8GB eMMC

Input / Output :

- USB Ports : 1 x USB 2.0 host, 1 x Micro USB OTG
- COM port : 1 x RS485
- Ethernet : 1 x RJ45, 10/100/1000
- Power Connector : 1 x Terminal block 3 pin

Certifications :

- CE
- FCC
- Front IP : IP65
- Rear IP : IP20

Power Specifications :

- Power Input : 12~24V DC in with isolation
- Power Consumption : 7W

Display Spec :

- Size/Type : 5.6" TFT (Widescreen)
- Resolution : 1024 x 600
- Brightness : 300 cd/m² (typ.)
- Contrast Ratio : 400 : 1 (typ.)
- Max Colors : 256k (6bit)
- Touch : Projected Capacitive Multi-Touch (P-CAP)

Mechanical Specification :

- Cooling System : Fanless design
- Mounting : Mounting clips x 6
- Dimension (W x H x D) : 158 x 116 x 51 (mm)

Environment Considerations :

- Operating Temperature : 0 deg.C to 50 deg.C
- Storage Temperature : -20 deg.C to 60 deg.C
- Operating Humidity : 10% to 90% (non-condensing)

OS support:

- Operation System : Android 6.0
Ubuntu 16.04